

**Cryogenic-Globe and Globe/Check Valves, 725 P.S.I.**

Stainless steel body and topwork,  
“live loaded” gland packing  
“ cleaned and degreased for oxygen service ”

**Part No. 03351.X.0003**

**Part No. 03351.X.5003 Globe/Check Valve**  
Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)




*GVNFLSS Series*

**Applications:**

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.  
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)  
Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	ASTM
1 Body	A 351 CF8
2 Valve seal up to 2"	PTFE / Carbon filled (25%)
2a Valve seal from 2½"	PTFE
3 Disc	A 276 Grade 304
4 Bonnet gasket	PTFE
5 Headpiece	A 276 Grade 304
6 Bolts	A 194 B8
8 Stem	A 276 Grade 304
9 Gland packing	Graphite / PTFE
10 Gland nut	A 276 Grade 303
11 Handwheel	Aluminium alloy
12 Spring	A 276 Grade 302
13 Bush	B 130 Alloy A

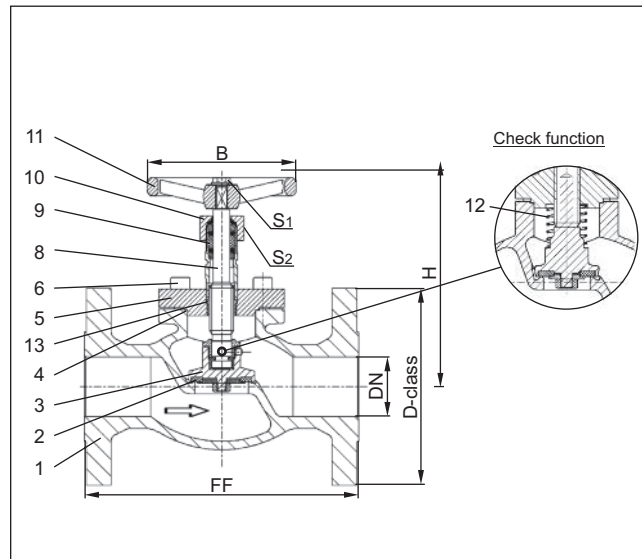

Standard marking acc. to Pressure Equipment Directive 97/23/EG (PED).



Marking acc. to Directive 99/36/EG (TPED) will only be carried out by written notice on purchase order.



Type 03351 – Standard design	Technical data							
	Nominal size	Inches	1"	1½"	2"	2½"	3"	4"
Dimensions code – Flange ANSI B16.5 class 300	.X.	1000	1400	2000	2400	3000	4000	
Flange-ø	D-class	123.9	155.4	165	190.5	209.5	254	
Face-to-face dimension	FF	160	200	230	290	310	350	
Height	H	140	175	200	260	310	350	
Handwheel-ø	B	100	125	125	200	250	315	
Wrench size across flats	S <sub>1</sub>	10	13	13	13	13	13	
Wrench size across flats	S <sub>2</sub>	30	36	36	36	36	41	
Weight	LBS.	9.9	20.02	28.38	45.32	60.72	92.4	
CV-Value	gal/min	13.4	26.3	43.2	82.7	120.9	195.2	

Dimensions in mm